





MOPAR.

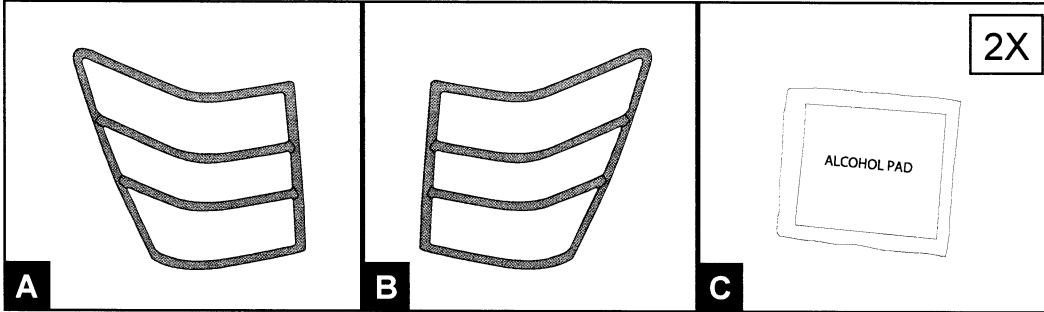

- GB**
- Tail Lamp must be at ambient condition (minimum 70°F/20°C) for a period of four (4) hours.
  - Clean each vehicle Tail Lens with a rag to remove any dirt or debris, and allow to dry.
  - Alcohol prep pads supplied **MUST BE** used per installation instructions
  - Apply uniform pressure to the guard for thirty (30) seconds.
  - Do not tug or pull on the Tail Lens Guards for 24 hours.
  - Do not wash car for twenty-four (24) hours.

- E**
- La luz trasera debe estar a temperatura ambiente (mínimo 70° F / 20° C) durante un período de cuatro (4) horas.
  - Limpie las lentes traseras de cada vehículo con un trapo, para eliminar cualquier suciedad o restos y dejarlas secar.
  - Las almohadillas preparadas con alcohol que vienen con el producto **DEBEN** usarse siguiendo las instrucciones de instalación.
  - Aplique una presión uniforme a la guarda durante treinta (30) segundos.
  - No trate de mover o desplazar los protectores de las lentes durante 24 horas.
  - No lave el auto durante veinticuatro (24) horas.

- F**
- Le feu rouge arrière doit être à température ambiante (minimum 70°F/20°C) pendant une durée de quatre (4) heures.
  - Lavez chaque lentille arrière du véhicule avec un chiffon pour enlever toute trace de saleté ou de débris, et laissez sécher.
  - Les tampons imbibés d'alcool **DOIVENT ÊTRE** utilisés en se conformant aux instructions.
  - Exercez une pression uniforme sur le dispositif de protection pendant trente (30) secondes.
  - Ne pas tirer sur les grilles de feu arrière pendant 24 heures.
  - Ne lavez pas votre véhicule pendant vingt-quatre (24) heures suivant l'installation.

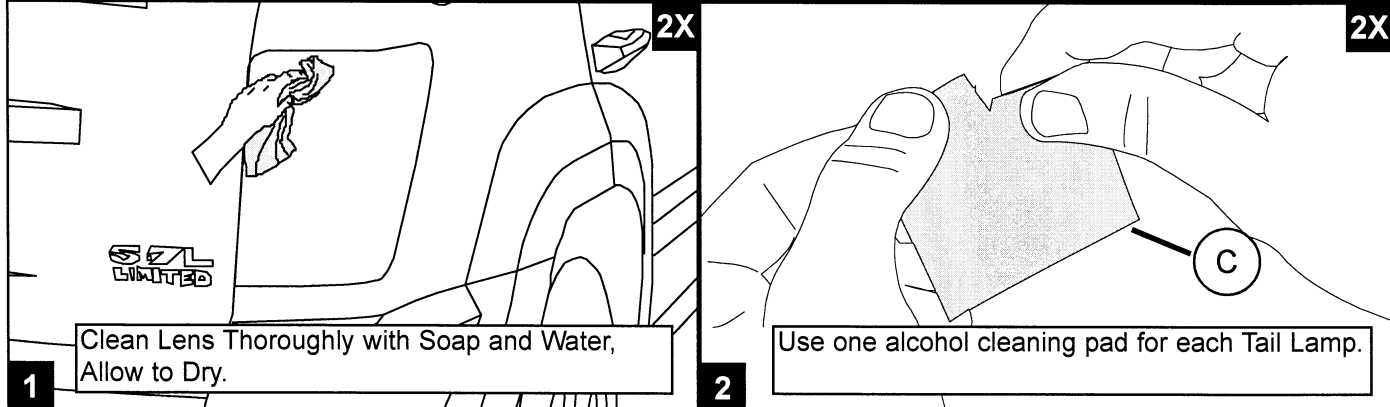

**1** Clean Lens Thoroughly with Soap and Water, Allow to Dry.

**2** Use one alcohol cleaning pad for each Tail Lamp.



**3** **2X**

**IMPORTANT** - Vehicle must be at Minimum Ambient Temperature for four (4) hours.

**4** **2X**

**IMPORTANT** - Align the guard Perfectly with the edge of the lamp closest to Liftgate.

**5** **2X**

Lightly press the inner edge of guard to the lamp surface.

**6** **2X**

Check alignment on three (3) edges shown, the outside edge may be slightly larger than lamp.

**7** **2X**

Lightly press the outer edge of guard to the lamp surface.

**8** **2X**

Check alignment on three (3) edges shown, the outside edge may be slightly larger than lamp.

**9** **2X**

Firmly press guard uniformly for thirty (30) seconds.

**10**

No Car Wash for 24 Hrs.